



Truck Mounted 680



Truck Hydraulic Drive



Custom Truck Bumpers



430 Right Discharge



430 Right Discharge



680 Left Discharge



**'REEL' Efficient TMR mixer**

Standard Features,  
All Models

Extremely low horsepower usage  
Low friction poly liners reduces  
fuel cost and increases life

Low loading height  
Left or right side  
discharge

Gentle tumbling action; less fines, less compacting  
Sweep belting on Reel picks up small grains and  
cleans out mixer


Commercial Features

Hydraulic drive discharge  
conveyor

Ganged grease zerks

All chains in sealed oil baths for low maintenance

Trailer mounted mixers					Truck mounted mixers		
Capacity Cu Ft (Bu)	340 (230)	430 (300)	560 (390)	680 (475)	Capacity Cu Ft (Bu)	430 (254)	680 (475)
Loading height ***	7' 8"	8' **	8'	8' 7"	Loading height on 2WD truck*	8' 6"	9' 2"
Overall height	8' 2"	8' 6" **	9' 8"	10'	Overall height on 2WD truck*	9'	10' 6"
Reel size	5' 10" X 12'	5' 10" X 15'	6' 8" X 15'	7' 4" X 15'	Reel size	5' 10" X 15'	7' 4" X 15'
Empty weight	6,700	8,100	12,600	13,400	Empty weight of mixer	6,850	10,256
Hitch weight (empty)	700	820	1,300	1,400	Overall length of mixer	17' 5"	18'
Overall length of mixer	13' 9"	16' 9"	17' 10"	17' 10"	Hydraulic reservoir capacity	55 gal	55 gal
Overall length	18' 3"	21' 5"	22' 2"	22' 2"	Horsepower to mix	13 Hp	19 Hp
Overall width tire to tire	7' 10"	8' 4"	8' 9"	10' 3"	Horsepower from PTO	25 hp	30 hp
Overall width with 5' elevator	9' 3"	9' 8"	10' 9"	11' 3"	Recommended cab to axle	~142"	~142"

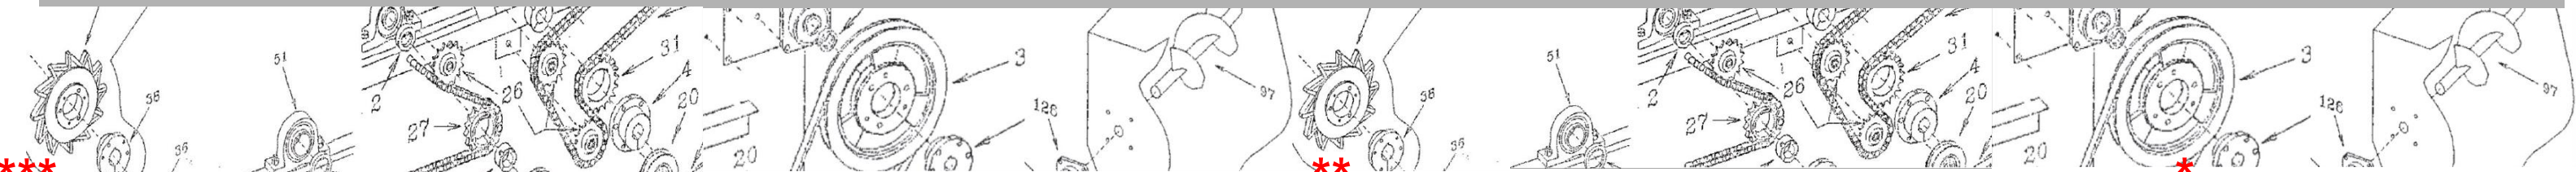

\*\*\* We recommend loading from the discharge (high) side to prevent damage to the machine

\*\* With high frame, 385 tires. Standard frame is 3.5" lower

\* Our best estimate, trucks will vary



New LED Remote



Loader Bars



Bunk Guards



New Break-Away Magnet



Tire Options



The "REEL" Efficient TMR mixer

**Mixer Options:**

- Right or left-hand discharge
- New Break-A-Way magnet
- Discharge "hood"
- Bunk guards
- Loader Bars
- 1000 or 540 RPM PTO
- Stop, turn and tail lighting
- Tire options
- Discharge elevator length
- CV PTO
- Stationary models

**Scale Options:**

- Choice of Weigh-Tronix or Digi-Star 4-point scale
- Wired or wireless remote displays
- Wireless zeroing switch
- New Large 4" super bright LED remote displays

**Truck mounted mixers:**  
(Patent Pending)

- 100% hydraulic drive, electronic control
- Fully integrated with the automatic transmission
- Extremely low power requirement



680 truck Mount



Truck Control Box



FARM AID EQUIPMENT, INC., 40 EAST 1<sup>ST</sup> STREET, CORSICA, SD 57328

Phone (605) 946-5479 Fax (605) 946-5899 [www.farmaidmfg.com](http://www.farmaidmfg.com)

